


LUNA



Based on the popular Dolomite stone with its very subtle veining and pure white background, Luna is perfect for the customer who wants clean lines and simplicity with a sophisticated flavor. With one color in two finishes and two sizes, it can be used many ways to achieve a final look that is both classic and modern.

*One Color - 2 Finishes
Natural & Levigato*

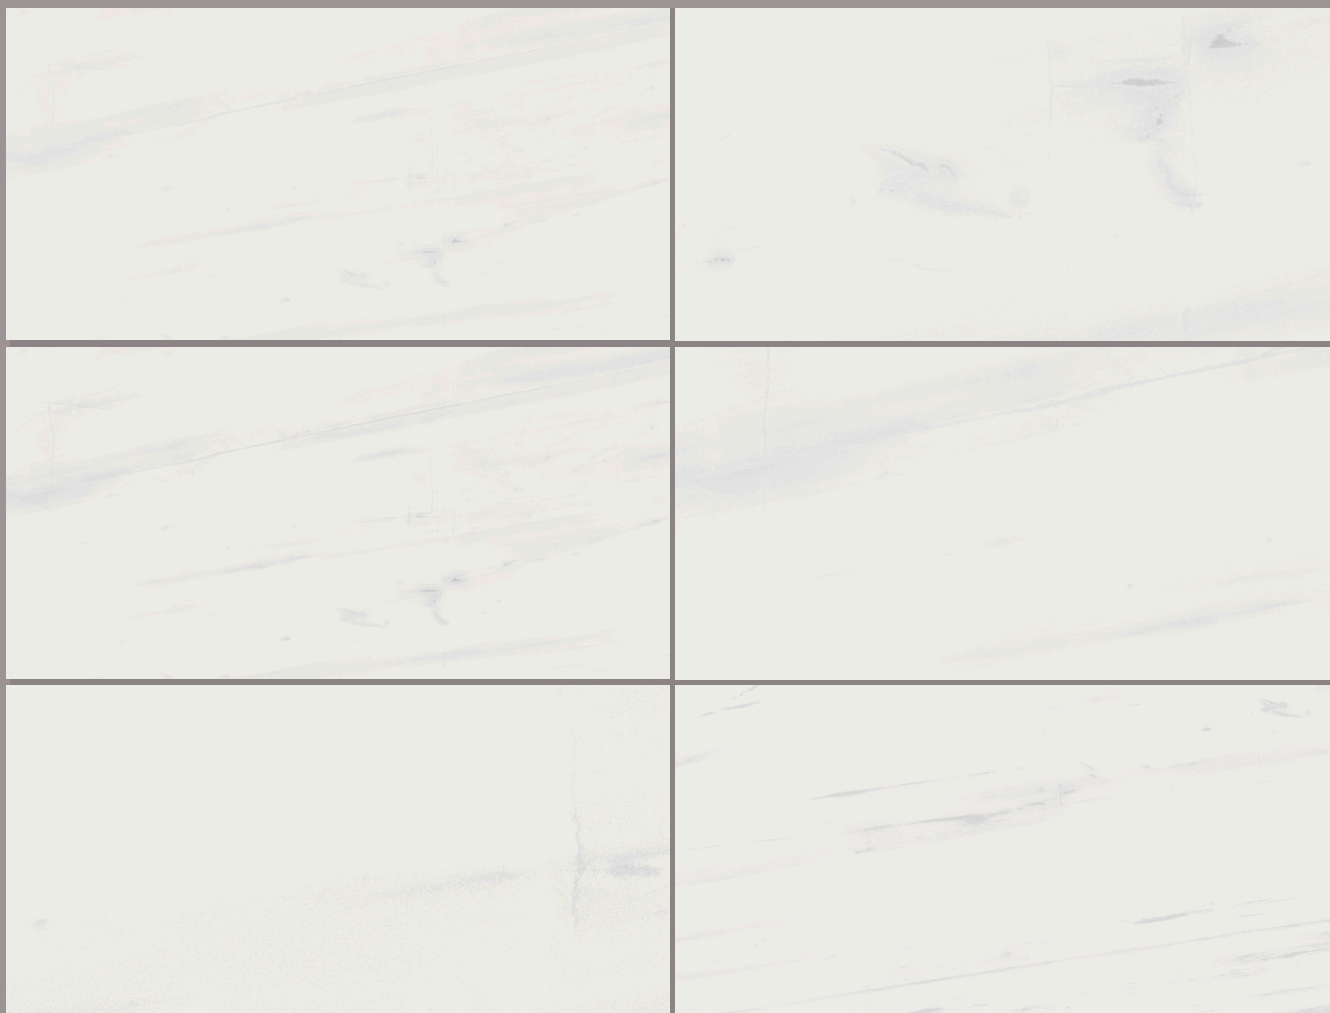

Bianco (CGLABO)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Color	Bianco CGLABO			
Sizes (Rectified)	Natural Finish		Levigato Finish	
	12 x 24	CGLABON/1224	12 x 24	CGLABOL/1224
	3 x 12	CGLABON/312	3 x 12	CGLABOL/312
	2 x 2	CGLABON/22		
Trim	Natural Finish		Levigato Finish	
	3 x 24 Surface Bullnose CGLABON/SBN		3 x 24 Surface Bullnose CGLABOL/SBN	

The surface bullnose is made from field tile that is cut, ground and reglazed.



2 x 2 CGLABON/22

NON-STOCK SIZES: FOR PROJECTS THAT MEET MINIMUM QUANTITIES
Non-Stock items are subject to minimum order quantities and should be confirmed at time of order.

Sizes are rectified and available in Levigato Finish only.

3 x 6	CGLABOL/36
12 x 12	CGLABOL/1212
4 x 24	CGLABOL/424
24 x 24	CGLABOL/2424

Installation

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. Using a leveling system can improve the installation of this product.

Usage & Handling

Luna is suitable for residential and light to moderate commercial use.

Levigato Cleaning and Maintenance:

The Levigato finish is suitable for walls and for residential and light commercial floors that do not require DCOF. As with all glossy material, the polished surface is susceptible to scratching during installation and use, and extra care should be taken when handling the material. Polished material can be etched with acids. The Levigato finish has a protective sealer applied on the production line. In any case, it is strongly recommended to apply extra protection by using FILA PD15 or something similar. A polished floor should be washed with normal, domestic use, NEUTRAL pH detergents and plenty of warm water in order to maintain its natural shine. Beware of products that say no rinsing is necessary, as detergents should always be completely rinsed off a polished floor. Avoid non-neutral detergents, solvents, abrasive or acid-based products.

Physical Properties	Norms	Value
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Resistant
Bending Strength	10545-4	Conforms
Slip Resistance	DIN51130	R9
Abrasion Resistance	10545-7	PEI IV
Dynamic Coefficient of Friction	ANSI A 137.1 BOT 3000E	Wet ≥ 0.42

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.