

Overcome is a terrazzo-look that surpasses the typical limits of that description. It's appealing as a terrazzo option, and also for its own unique aesthetic. The colors have terrazzo chips in different sizes and even include some contrasting colors to add depth and complexity. The chips are made using porcelain clay with different pigments instead of glaze, making this a truly technical product that is suitable for residential and commercial projects, including high-traffic commercial applications.



Dark Grey (LOOEDG)



Grey/Beige (LOOEGB)



Grey (LOOEGY)



White (LOOEWE)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

## Product Information

### Size (Rectified, Natural Finish)

12 x 24 LOOE--N/1224


### Colors

PRICE GROUP 1		PRICE GROUP 2	
Dark Grey	LOOEDG	White	LOOEWE
Grey/Beige	LOOEGB		
Grey	LOOEGY		

### Trim

The surface bullnose is made from field tile that is cut, ground and glazed.

2-1/2 x 24 Surface Bullnose LOOE--N/SBN

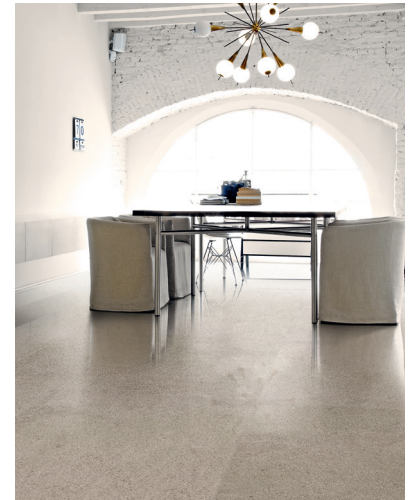

### Usage

Overcome is suitable for residential and commercial projects, including high-traffic commercial applications.

### Installation Information

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. Using a leveling system can improve the installation of this product.

To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

### Non-Stock Sizes & Finishes FOR PROJECTS THAT MEET MINIMUM QUANTITIES

Non-Stock prices are subject to change and should be reconfirmed at time of order.

Natural Finish		Polished Finish	
24 x 24	LOOE--N/2424	12 x 24	Polished not available in this size
24 x 48	LOOE--N/2448	24 x 24	LOOE--P/2424
48 x 48	LOOE--N/4848	24 x 48	LOOE--P/2448
		48 x 48	LOOE--P/4848
Textured Finish			
12 x 24	Textured not available in this size		
24 x 24	LOOE--T/2424		
24 x 48	LOOE--T/2448		

### Physical Properties

Physical Properties	Norms	Value Natural	Physical Properties	Norms	Value Natural
Average Bending Strength	10545-04	45,5 N/mm <sup>2</sup> (average value)	Frost Resistance	10545-12	Resistant
Breaking Strength	10545-04	S ≥ 1300 N	Slip Resistance	DIN 51130 DIN 51097	R10 A
Water Absorption	10545-03	≤ 0,05	** Dynamic (DCOF) Coefficient of Friction	BOT 3000 ANSI A 137.1	Wet ≥ 0.42



\*\* These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.

As noted in the Americans with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.