


ANTICA

by MAGICA

The Antica collection features three classic marbles in white and grey with an antiqued finish. The result is a marble-look that has been aged over time, including scratches and imperfections. It is modern interpretation of a truly classic look, with a sophisticated color palette and some special mosaics that complete the package.



Carrara White (MAAACW)

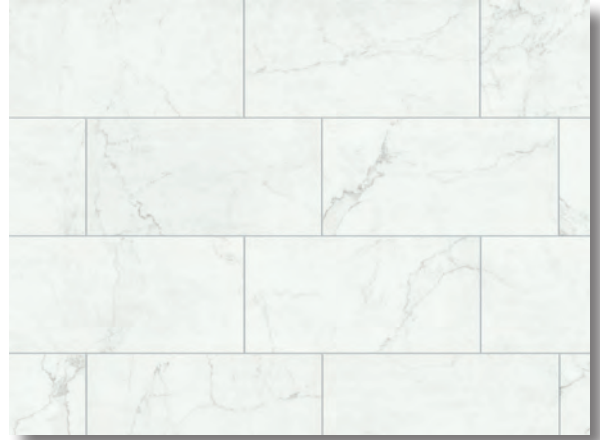

Grey Marble (MAAAGM)



Bardiglio Grigio (MAAABG)



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Product Information

Colors

Bardiglio Grigio (MAAABG)
 Carrara White (MAAACW)
 Grey Marble (MAAAGM)

Sizes - Rectified

12 x 24 MAAA-/1224
 6 x 24 MAAA-/624



Mosaic

3" Hex MAAA-/3HX - Full sheet shown



Carrara White
 MAAACW/3HX



Grey Marble
 MAAAGM/3HX



Bardiglio Grigio
 MAAABG/3HX

Freccia Mosaic Mix

MAAA/FA



The Freccia Mosaic has 3" x 4" chevron pieces in all three colors that are mixed and mounted with left and right chevrons creating an arrow "freccia" pattern.

Trim

The surface bullnose is made from field tile that is cut, ground and re-glazed.

MAAA-/SBN 3 x 24 Surface Bullnose

Installation Information

As with all inkjet products, there are many different graphics that are mixed and packed randomly. It is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles ANSI A 108.2 Section 4.3.8.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms	Dynamic (DCOF) Coefficient of Friction	DCOF	≥ 0.42 Wet
Water Absorption	10545-3	≤0.5% Conforms	The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.		
Frost Resistance	10545-12	Resistant			
Slip Resistance	DIN51130	R10			