

MARCA CORONA

# ARKISTYLE LIMESTONE



Clay (MCALCY)

12 x 24




8-1/2" Hex

The Arkistyle Limestone is a refined limestone look featured by the inclusion of marine fossils. Some of the fossils are hinted at and blend with the background color and others are more visible. With the classic 12 x 24 size and the 8-1/2" Hexagon, the Arkistyle offers options that lend themselves to original installations and customized spaces. The color palette is carefully designed to calibrate the tones and soft graphic effect allowing for colors to be combined together and used with other collections.




Limy (MCALLY)

12 x 24

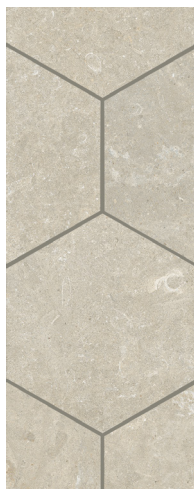

8-1/2" Hex

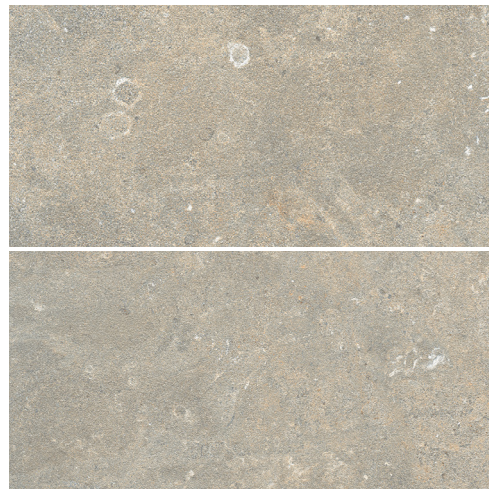


Fossil (MCALFL)

12 x 24



8-1/2" Hex

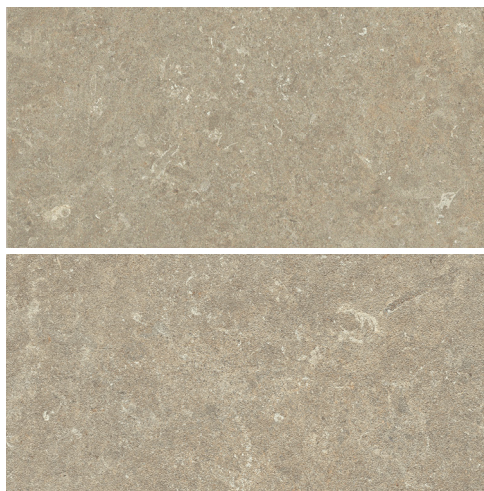

Earth (MCALEH)

12 x 24



8-1/2" Hex



Sand (MCALSD)

12 x 24



8-1/2" Hex

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

## Product Information

### Colors

Clay	MCALCY (White)
Earth	MCALEH (Beige)
Fossil	MCALFL (Medium Grey)
Limy	MCALLY (Light Grey)
Sand	MCALSD (Cream)

### Sizes

12 x 24 (Rectified)	MCAL--/1224
8-1/2" Hex (Non-rectified)	MCAL--/9HX

### Mosaic

2 x 2	MCAL--/22
-------	-----------

Please note that, while the 12x24 and the 8-1/2" Hexagon come in all the same colors, they are produced on different production lines and have their own graphic development. So they will coordinate with each other, but are not expected to have an exact match.

### Trim

The surface bullnose is made from field tile that is cut, ground and reglazed.

3 x 24 Surface Bullnose	MCAL--/SBN
-------------------------	------------

### Usage

Arkistyle Limestone is suitable for residential and commercial use.

### Installation

To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most tile manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

**NOTE: The 8-1/2" Hex is non-rectified.** The minimum recommended grout joint is 3/32" and it may be necessary to adjust the size of the grout joint during installation.

### TECHNICAL INFORMATION

Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<150 mm <sup>3</sup> Conforms
PEI	N/A	See 'Deep Abrasion'
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Resistant
Breaking Strength	10545-4	Conforms
Slip Resistance	DIN51130 DIN51097	R10 A + B
Dynamic Coefficient of Friction (DCOF)	BOT 3000 STANDARD ANSI A326.3:2021	≥ 0.42 Wet

\*\* These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.

As noted in the Americans with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.

Colors: Fossil (MCALFL)  
Earth (MCALEH)  
20% Pre-consumer  
Recycled Ceramic Content



This product contributes towards satisfying MR credit 4.1 under LEED®.

