

COOL

Mariner's Cool series has the look of a freshly plastered wall. The graphic is very soft with subtle movement, and the surface has areas that are matte and areas with a semi-gloss sheen, making the tile come alive as it is touched by the light. The color palette of Cool is all about warmth with a warm white, grey, almond and green. The factory designed this 12 x 36 series as a wall tile but, as a porcelain, it is also suitable for floors.



Almond (MRCLAD) and Forest (MRCLFT)



Steel (MRCLSTL)



Ghost (MRCLGT)

Product Information

Size - Rectified

12 x 36 MRCL--/1236


Colors



Ghost (MRCLGT)



Almond (MRCLAD)

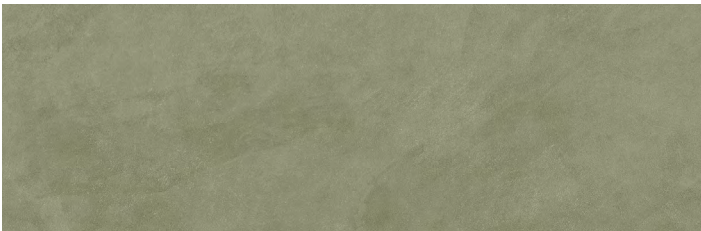

Forest (MRCLFT)



Steel (MRCLSL)

Usage

Cool is suitable for residential and light commercial applications.

Installation

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. There are special setting requirements and materials for large format tiles. Please refer to the TCNA Handbook and guidelines by your mortar manufacturer for more information.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Abrasion Resistance - PEI Rating	10545-7	PEI 3 - Forest PEI 4 - Almond, Steel PEI 5 - Ghost	Slip Resistance	DIN 51130	R10 A+B
Water Absorption	10545-3	Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A326.3.2021 BOT 3000E	≥ 0.42 Wet
Frost Resistance	10545-12	Resistant			

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.