

ELISIR TOUCH from Marca Corona

MCET

Elisir Touch is inspired by fine oak planks with wide knots and warm tones. The “touch” part comes from the realistic details of wood grain that you can both see and touch. The graphic and texture work together to create a faithful reproduction of noble wood that is clean and not rustic. Available in 8x48 rectified and 3x24 non-rectified, the two sizes allow for many fun design concepts.



Miele (MCETME)



Whiskey (MCETWY)



Ebanite (MCETEE)



Malto (MCETMO)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.



Product Information

Sizes

8 x 48 (Rectified) MCET--/848
 3 x 24 (Non-Rectified) MCET--/324

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.


Colors

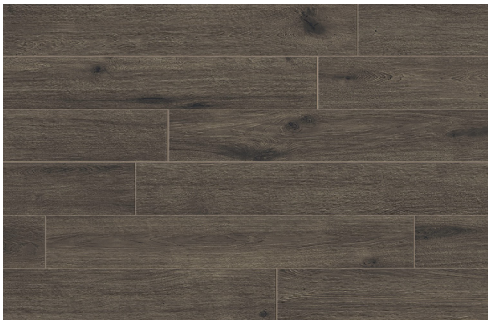


Ebanite (MCETEE)



Malto (MCETMO)

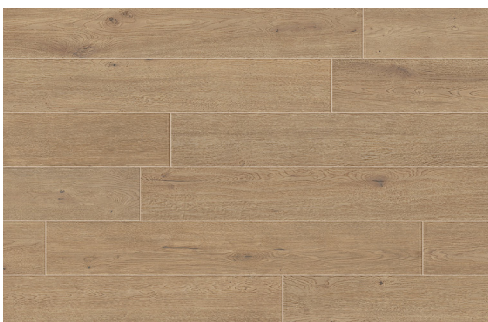

Miele (MCETME)

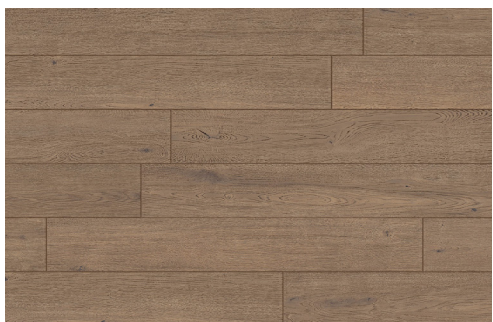

Whiskey (MCETWY)

Installation Information

We recommend using a tile leveling system to install this product.

Before installing the tile you should:

- Ensure the perfect planarity (flatness) of underlying floor base.
- Always double-check the quality of the tiles.
- When setting, tile should be only slightly staggered so that the ends of the tiles are within 8" or less from the ends of the corresponding staggered tile. (See figure 1).
- Staggered spacing does not need to be uniform, but should not exceed 8" recommendation.
- It is preferable to use a grouting material that matches the color of the tiles.

Usage

Elisir Touch is suitable for residential and light commercial use.

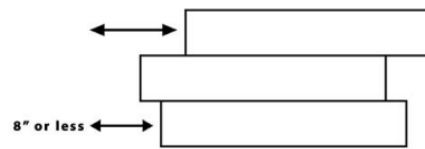


Figure 1

As with all inkjet lines, there are many different graphics that are mixed and packed randomly. It is important to pull from multiple boxes during installation, rotate pieces and note the placement of the different images in order to get the proper final blend.

TECHNICAL INFORMATION

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<150 mm ³ Conforms	Breaking Strength	10545-4	Conforms
PEI	N/A	"See Deep Abrasion"	Slip Resistance	DIN51130 DIN51097	R9 A
Water Absorption	10545-3	Conforms	Dynamic Coefficient of Friction (DCOF)	BOT 3000E STANDARD ANSI A326.3:2021	≥ 0.42 Wet
Frost Resistance	10545-12	Resistant			

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed. For more information see our current handout *Americans with Disabilities Act and Slip Resistance of Tile*.

