

Marmo


White Beauty

by Gazzini




Gazzini's new marble, White Beauty, is their interpretation of the real marble with the same name. They wanted to make a marble with green tones and selected the White Beauty because it's a unique material that is now difficult to find and extremely expensive due to the quarry closing in 2023. They achieved the realistic look and feel by using large quantities of glaze and layering them in a way to get the very deep green and black veins that are the defining part of this marble's look. They also brush the surface which creates additional depth in the graphic and also gives it a touch that feels honed.

Sizes:
Rectified,
Natural
Finish

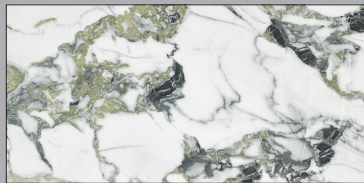

12 x 24 (GIMOWBN/1224)

Mosaic:




4" Hex
(GIMOWBN/4HX)

Shown in full sheet
Image not to scale




24 x 48 (GIMOWBN/2448)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

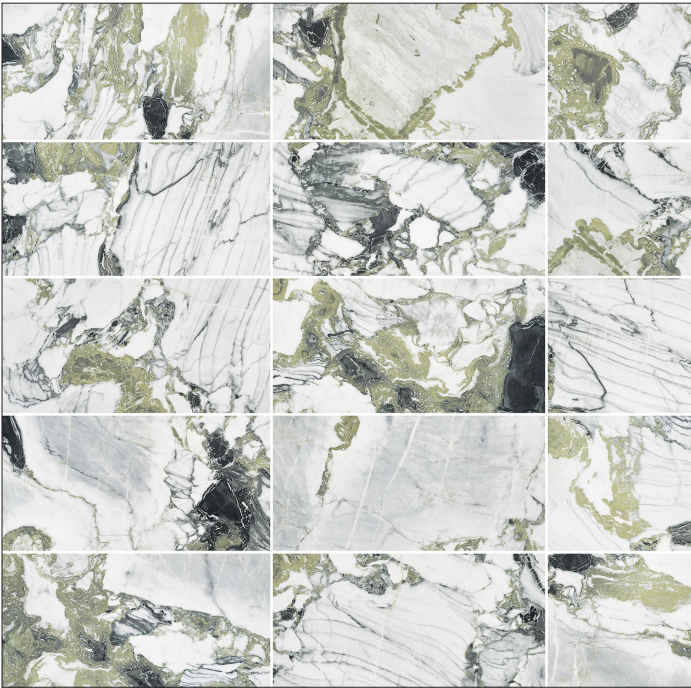


12 x 24 (GIMOWBN/1224)

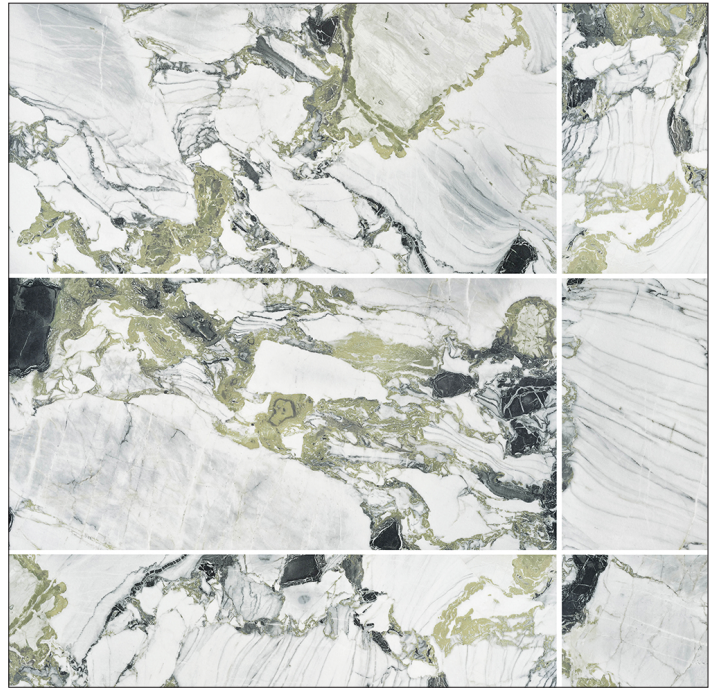

24 x 48 (GIMOWBN/2448)

It should be noted that there is a wide range of variation with many different graphics that are mixed and packed randomly. To attain the proper mix of graphics and color, it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

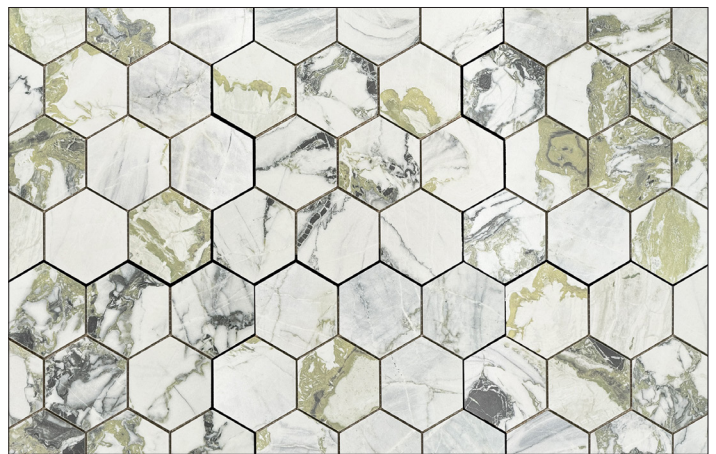

4" Hex (GIMOWBN/4HX)

Trim GIMO--/SBN 3 x 24 Surface Bullnose

The surface bullnose is made from field tile that is cut, ground and reglazed.

Usage & Installation

Marmo White Beauty is suitable for walls and floors including residential and light to moderate commercial use.

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. There are special setting requirements and materials for large format tiles. Please refer to the TCNA Handbook and guidelines by your mortar manufacturer for more information.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Abrasion Resistance - PEI Rating	10545-7	PEI 4	Slip Resistance	DIN 51130	R9
Water Absorption	10545-3	Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A326.3	≥ 0.42 Wet
Frost Resistance	10545-12	Resistant			

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as

the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.