

VIBES by SARTORIA

SAVS

Vibes comes in four glossy colors that have subtle shade variation which is enhanced by the way the glazed naturally pool around the edges. The series centers around the Peak version which is a structured tile with a simple pillow shape, and it also has a standard flat tile in the same 4 colors. The pillow allows customers to create a 3D design that looks stunning on its own, but it's also fun to play with using the two versions together.



2 x 10 Peak



Niveo Glossy (SAVSNOG/210PK)



Salvia Glossy (SAVSSAG/210PK)




Azzurro Glossy (SAVSAOG/210PK)



Indaco Glossy (SAVSIOG/210PK)


2 x 10

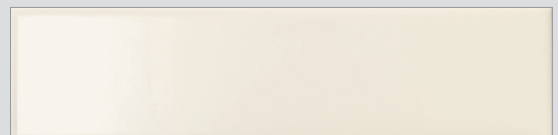


Niveo Glossy (SAVSNOG/210)



Salvia Glossy (SAVSSAG/210)

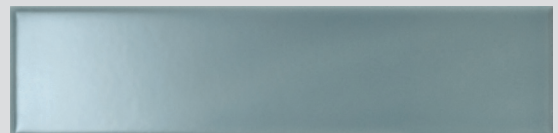

Azzurro Glossy (SAVSAOG/210)

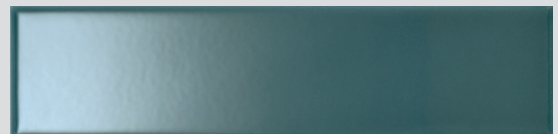

Indaco Glossy (SAVSIOG/210)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Product Information

Sizes - Non-Rectified

2-1/2 x 10 Glossy SAVS--G/210
2-1/2 x 10 Peak Glossy SAVS--G/210PK

Due to the nature of this special material, orders for the 2x10 and 2x10 Peak must be for full boxes only. Please note that we do not accept returns in general. In the rare occurrence that we make an exception and do take a return of this product, only factory sealed full boxes can be accepted.

Colors (Shown on front)

SAVSAO Azzurro (Light Blue) SAVSNO Niveo (White)
SAVSIO Indaco (Deep Blue) SAVSSA Salvia (Sage)

Coordinating Trim

Expect variation in color and size between field and trims. There is limited shade variation on the pencil bullnose; the shading is more uniform than the field tile. It is advisable to show samples to customers so they understand what the trim looks like and decide if they find it acceptable.

1/2 x 10 (Pencil Bullnose/Jolly) SAVS--G/110SBN



SAVS Trim & Profile

Installation Information

Vibes is intended for interior walls. The factory recommends using a minimum joint of 3/32". If installing with a cement-based adhesive, it is recommended to use flexible setting materials that meets the ISO S1 standard (e.g. Servolight by Kiesel). All substrates should be properly reinforced to be sure there is no movement. Wood studs need to be dry and properly braced with a minimum depth of 3 1/2". For mortar installations, the mortar bed has to be cured (less than 2% humidity) and has to have proper reinforcing.

It is important to work with the layout, blending pieces with different hues, within each carton and pulling from several cartons, to get the proper blend during installation. Due to the different production techniques and times, expect variation in size and color between field and trim.

Please note that glossy glazes are susceptible to scratching during installation as well as use. This is especially true on darker colors. Please handle the material with care. There is wax on the surface of the tile to protect it during transit and installation. It should be removed before grouting. Wetting the wax with water and letting the water sit for a few minutes before wiping will help ease removal.

Note: Due to different production times and machinery there may be sizing differences between the plain field tile and the structured Peak.

