



Shizen is a new generation of wood-look porcelains. By using the 3D technology, Edimax gives maximum realism to the product by creating a tactile wood grain surface. With its color palette comprised of 4 warm tones — from the soft, golden hues of the Miele color to the dark, velvety brown of Torba — this material can be used to create inviting and cozy spaces. The 6 x 48 size also adds to the realism of this line as the thinner planks create more variation.



Ambra (EXSNAA)



Cenero (EXSNCE)



Miele (EXSNME)



Torba (EXSNNTA)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Product Information

Colors

EXSNAA	Ambra (Amber)
EXSNCE	Cenere (Grey/Brown)
EXSNME	Miele (Honey)
EXSNTA	Torba (Dark Brown)

Size (Rectified)

6 x 48 EXSN--/648

Usage

Shizen is suitable for residential and light commercial use.

INSTALLATION INFORMATION

We recommend using a tile leveling system to install this product.

Before installing the tile you should:

- Ensure the perfect planarity (flatness) of underlying floor base.
- Always double-check the quality of the tiles.
- When setting, tile should be only slightly staggered so that the ends of the tiles are within 8" or less from the ends of the corresponding staggered tile. (See figures 1 & 2)
- Staggered spacing does not need to be uniform, but should not exceed 8" recommendation.
- It is preferable to use a grouting material that matches the color of the tiles.
- We recommend using a tile leveling system to install this product.

As with all inkjet lines, there are many different graphics that are mixed and packed randomly. It is important to pull from multiple boxes during installation, rotate pieces and note the placement of the different images in order to get the proper final blend.

TECHNICAL INFORMATION

Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<150 mm ³ Conforms
PEI	ISO 10545-7	PEI 5
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Resistant
Breaking Strength	10545-4	Conforms
Slip Resistance	DIN51130 DIN51097	R10 A+B
Dynamic Coefficient of Friction (DCOF)	BOT 3000E STANDARD ANSI A326.3:2022	≥ 0.42 Wet

** These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.

As noted in the Americans with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.

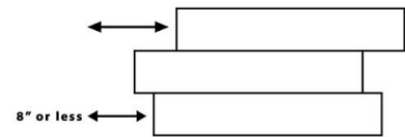


Figure 1