


STONE ONE



Grey MCSOGY

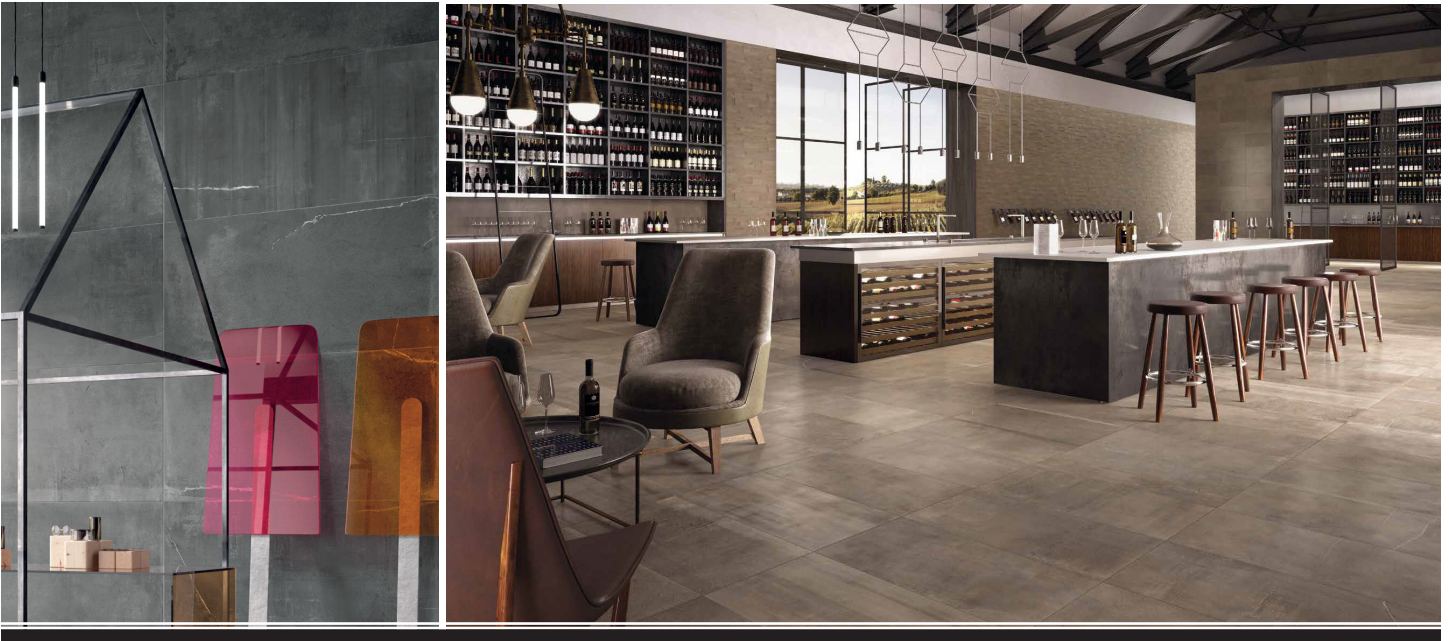

Dark MCSODK



Silver MCSOSR

Blending graphics showing distinctive veins found in nature with the metropolitan character of cement, Stone One is a full-body porcelain offering an original interpretation of natural stone. Each color in the series includes strong veining patterns that convey a striking effect when installed due to the multi-directional movement of the veins.

Colors

Dark (Charcoal)	MCSODK
Grey (Creamy Grey)	MCSOGY
Silver (Medium Grey)	MCSOSR

Size (Rectified)

12 x 24 Natural (R10)	MCSO--/1224
-----------------------	-------------

Mosaics

Herringbone*	MCSO--/HB
Basketweave Silver**	MCSOSR/BW

Trim (Natural Finish only)

The surface bullnose is made from field tile that is cut, ground and reglazed.

3 x 24 Surface Bullnose	MCSO--/SBN
-------------------------	------------

Usage

Stone One is suitable for residential and commercial applications.


Installation

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. Using a leveling system can improve the installation of this product.


To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend. Stone One is suitable for residential and commercial applications.

Herringbone Mosaic*


Available in 3 colors



Silver MCSOSR/HB



Grey MCSOGY/HB



Dark MCSODK/HB

Basketweave Mosaic**

Silver with Dark dots



MCSOSR/BW

Color: Dark (MCSODK)
 20% Pre-consumer Recycled Ceramic Content
 This product contributes towards satisfying MR credit 4.1 under LEED®.

Technical Information

Physical Properties	Norms	Value
Average Bending Strength	10545-04	45,5 N/mm ² (average value)
Breaking Strength	10545-04	Compliant
Water Absorption	10545-03	≤ 0,05
Frost Resistance	10545-12	Resistant
Slip Resistance	DIN 51130	R10
	DIN 51130 DIN51097	R11 C (Textured Finish)
** Dynamic (DCOF) Coefficient of Friction	DCOF	Wet ≥ 0.42

Non-Stock Sizes

For Projects That Meet Minimum Quantities

Natural

24 x 24 MCSO--/2424
 18 x 36 MCSO--/1836
 48 x 48 MCSO--/4848*
 *48x48 Available in Silver (SR) & Ivory (IY) only.

Textured (R11 C)

12 x 24 MCSO--T/1224
 18 x 36 Paver* MCSO--T/1836P
 24 x 24 Paver* MCSO--T/2424P
 (*18x36 Paver available in Dark (DK), Ivory (IY) & Silver (SR) colors)

MADE IN ITALY



U.S. GREEN BUILDING COUNCIL MEMBER

** These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.

As noted in the Americans with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.