



T-Brick has another sibling in T-Box. The concept is simple - four of the most popular T-Brick colors are now available in a 5 x 5 square. As always with Sartoria, this is a line that is about intricate details that highlight the richness of traditional ceramic techniques, and they chose 5 x 5 for the square version because it harkens back to the historical zellij size. The colors have exquisite variation and the clay body provides an authentic handmade feel.


Like the hand-crafted, traditional Moroccan tile that inspired this look, the bisque has an uneven surface texture with irregular edges and intentional imperfections. All colors have variation, but some colors have more dramatic movement than others. It is important to blend well during installation to get the intended final look.




Coconut (SATXCT)



Seashell (SATXSL)

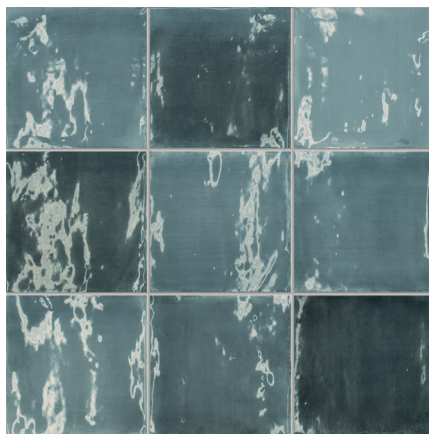

Cerulean (SATXCN)

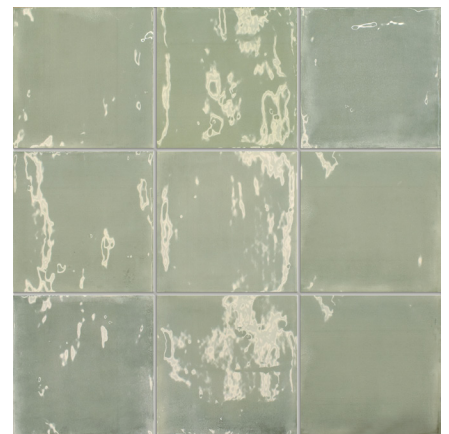

Aquamarine (SATXAE)

Colors are intended as a guide only and may vary from actual tile. Please check tile samples before making final selections. See reverse side for additional product information.

PRODUCT INFORMATION

Size Non-Rectified

5 x 5 SATX--/55

Colors

 Colors shown on the front

SATXAE Aquamarine

SATXCN Cerulean

SATXCT Coconut

SATXSL Seashell

Due to the nature of this special material, orders for T-Box must be for full boxes only. Please note that we do not accept returns in general. In the rare occurrence that we make an exception and do take a return of this product, only factory sealed full boxes can be accepted

Coordinating Trim

 Use T-Brick (SATB) trim

Expect variation in color and size between field and trims. There is limited shade variation on the pencil bullnose; the shading is more uniform than the field file.

SATB--/113SBN 1/2 x 12-3/4 SBN (Pencil Bullnose/Jolly)



SATB 1/2 x 12-3/4 SBN (Pencil Bullnose/Jolly) & Profile

1/2 x 12-3/4 SBN
(Pencil Bullnose/Jolly)
with SATB field tile.



T-Brick Trim Colors:

SATBAE Aquamarine

SATBCN Cerulean

SATBCT Coconut

SATBSL Seashell

Installation Information

Due to the irregular edges on this handcrafted look, the factory recommends using a minimum joint of 3/32".

T-Box is intended for interior walls. If installing with a cement-based adhesive, it is recommended to use flexible setting material that meets the ISO S1 standard (e.g. Servolight by Kiesel). All substrates should be properly reinforced to be sure there is no movement. Wood studs need to be dry and properly braced with a minimum depth of 3-1/2". For mortar installations, the mortar bed has to be cured (less than 2% humidity) and has to have proper reinforcing.

It is important to work with the layout, blending pieces within each carton and pulling from several cartons, to get the proper blend during installation. Due to the different production techniques and times, expect variation in size and color between field and trim.

There is wax on the surface of the tile to protect it during transit and installation. It should be removed before grouting. Wetting the wax with water and letting the water sit for a few minutes before wiping will help ease removal.

